



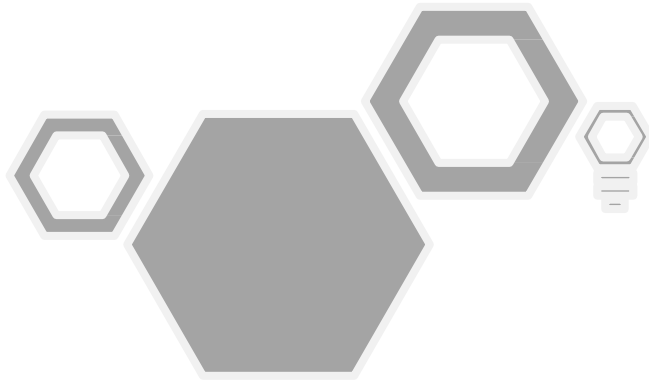

HEATER for CABINS

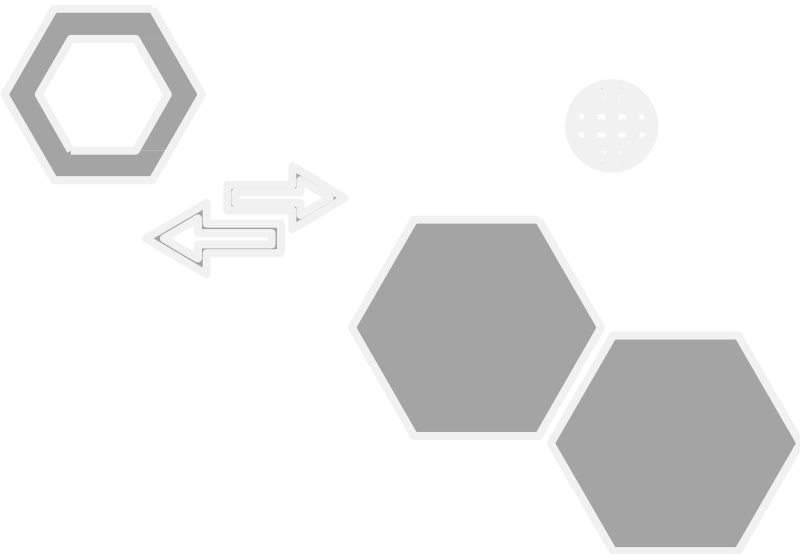

Effective Control
For Industrial Applications
GLHE01

TECHNICAL PROPERTIES

GENERAL

ADJUSTMENT	/ FOR CABIN INTERIOR
INSTALLATION	/ FLOOR MOUNT
METARIAL	/ ST37 BODY
TEMPERATURE	/ -10 C TO +55 C (STANDARD)
APPLICATION	/ OPERATOR CONTROL CABIN
VOLTAGE	/ 230VAC 50 Hz
SPEED	/ 2650 RPM
AIR FLOW	/ 160 m³/H
SOUND	/ 46 dB(A)
POWER FOR FAN	/ 19W
POWER FOR RESISTANCE	/ 1000 W
AIR INLET-OUTLET TEPM. DIFFERENCE	/ 25 °C


COATING

BODY	/ ELECTROSTATIC GALVANIZED COA.
	/ COLOR OPTIONAL
	/ 80 µM





It can be used in interior floor parts of the cabin

Air is directed towards the lower windshield.

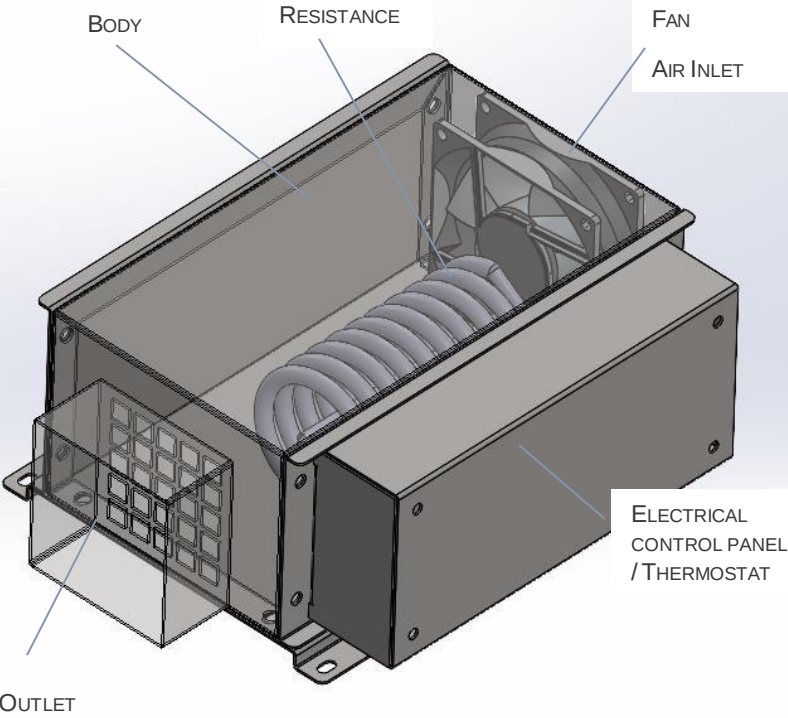

DIMENSIONS

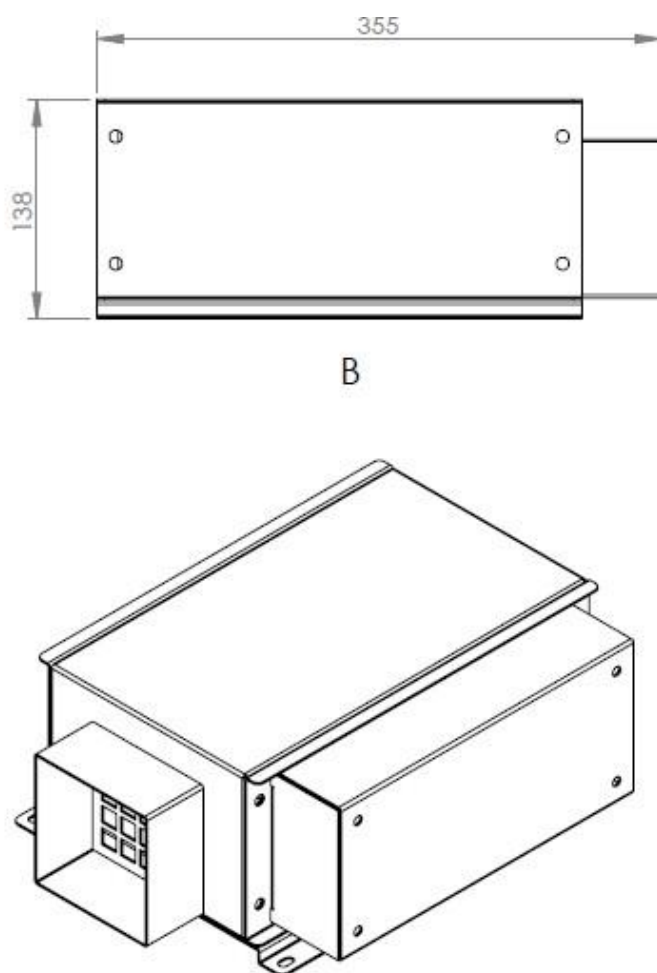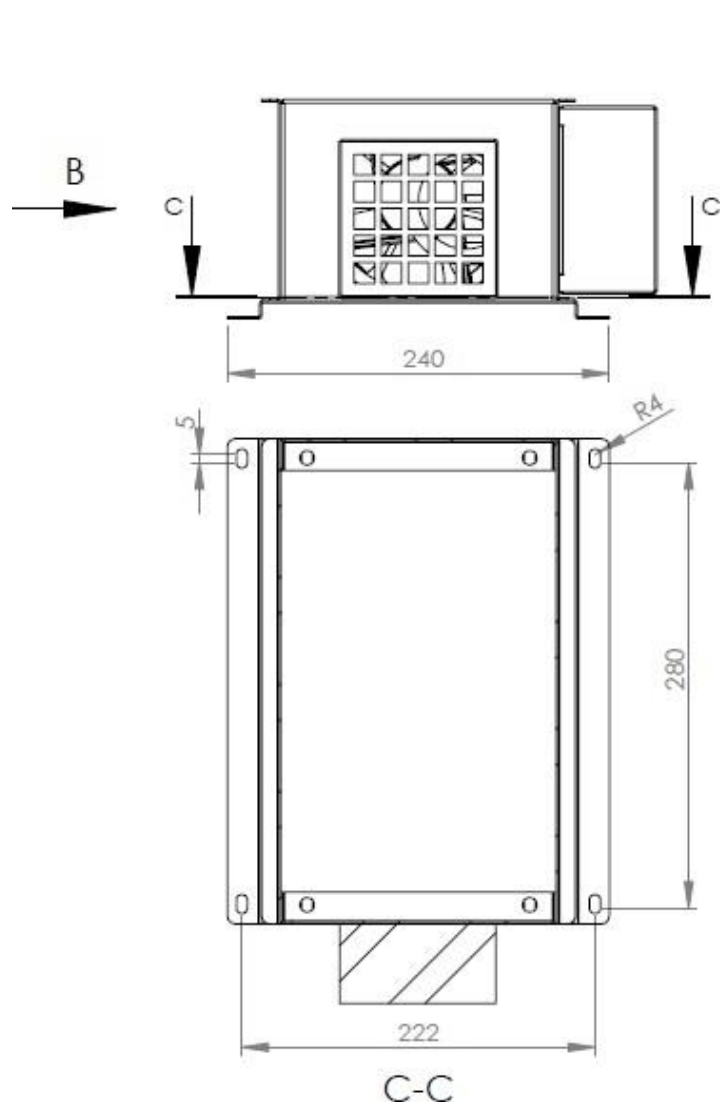

All dimensions are in mm.



Decko Global Ltd. Co.

www.decko-global.com
info@decko-global.com



www.decko-global.com