




**LOCK for CABIN  
DOOR**

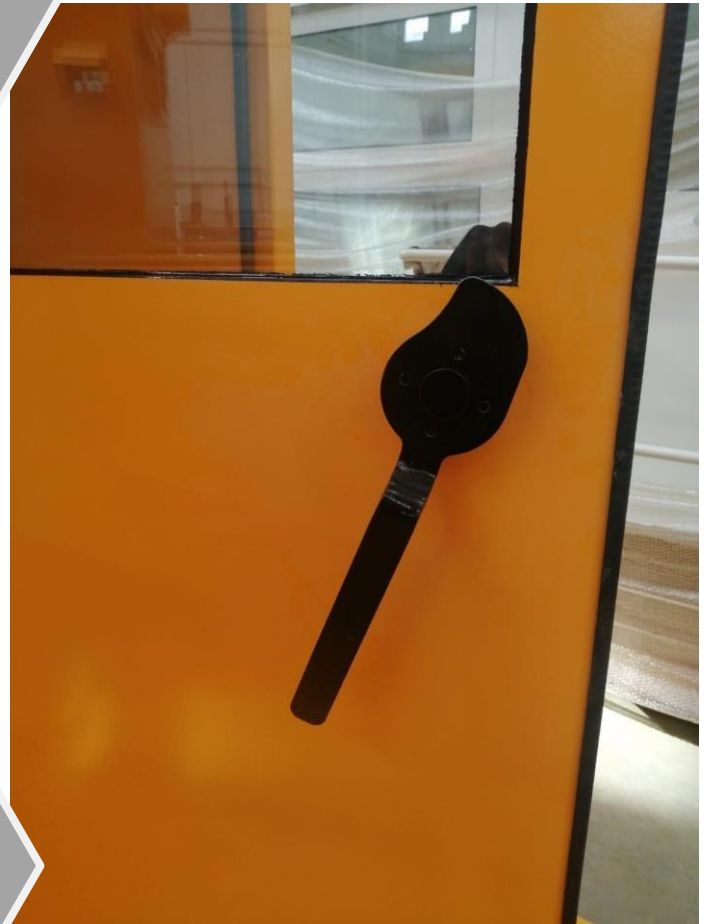

**Effective Control**  
For Industrial Applications  
**GLMDL 01**


# TECHNICAL PROPERTIES

## GENERAL

|              |                             |
|--------------|-----------------------------|
| ADJUSTMENT   | / FOR CABIN CABIN           |
| INSTALLATION | / M16 SCREW DIN931          |
| METARIAL     | / ST37 BODY                 |
| TEMPERATURE  | / -15 C TO +70 C (STANDARD) |
| APPLICATION  | / OPERATOR CONTROL CABIN    |

## COATING

|      |                    |
|------|--------------------|
| BODY | / PRIMER COAT      |
|      | TOP-COAT RAL 9005  |
|      | / TOTAL 80 $\mu$ M |

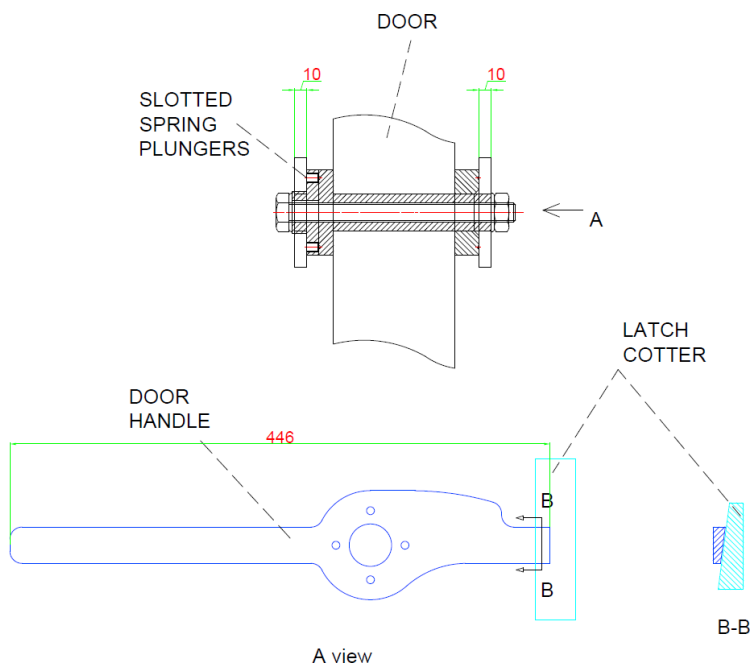


It provides the perfect solution for dust and water tightness.

It provides ease of maintenance with its simple design.



SAMPLE PHOTOS

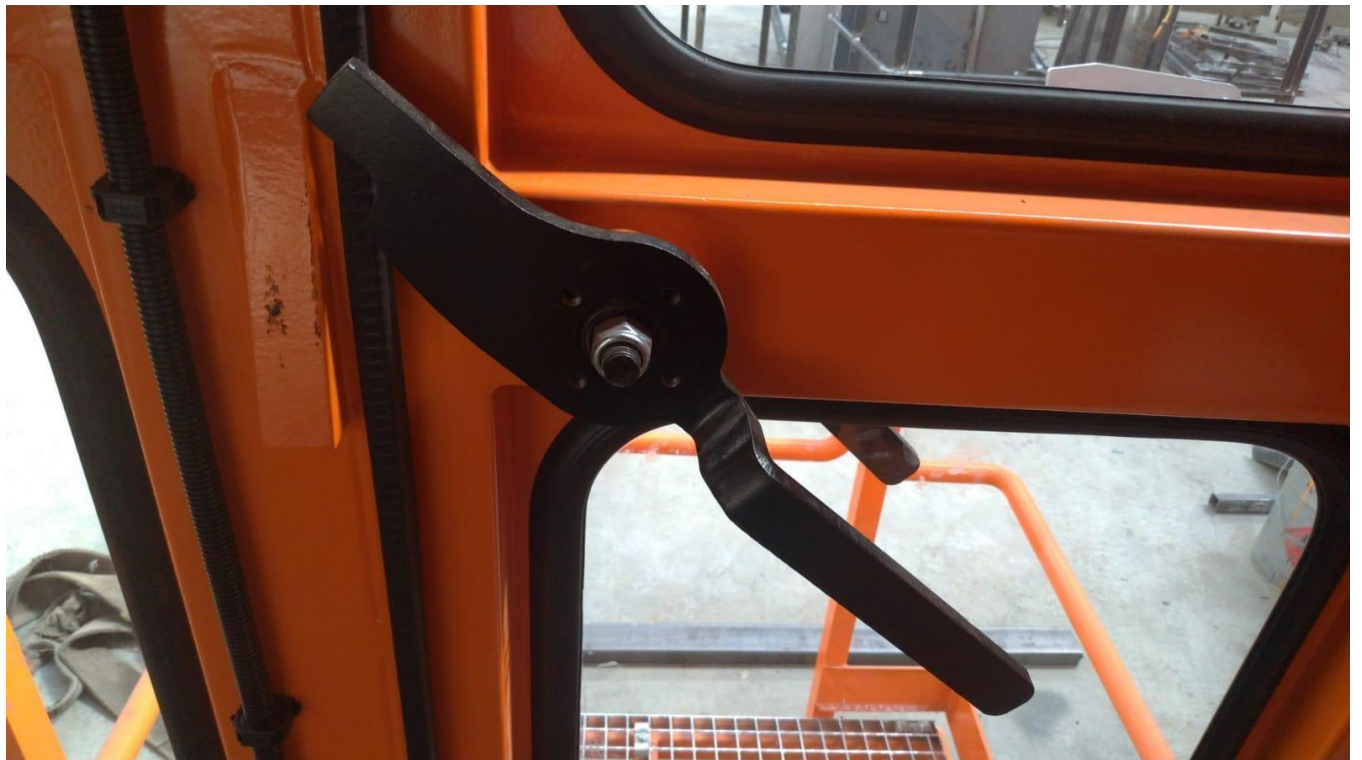



**Decko Global Ltd. Co.**

[www.decko-global.com](http://www.decko-global.com)  
[info@decko-global.com](mailto:info@decko-global.com)